

MASCHI A MACCHINA - MACHINE TAPS

MASCHI A MACCHINA **HSSE M35 5%Co**

SCANALATURE ELICOIDALI - ELICA DESTRA 15° - Imbocco "C"


Filettatura ISO 228/1 - GAS cilindrica BSP

MACHINE TAPS **HSSE M35 5%Co**


SPIRAL FLUTES - RIGHT HELIX 15° - Chamfer form "C"


ISO 228/1 - Whitworth pipe thread BSP

 HSSE



DIN 5156

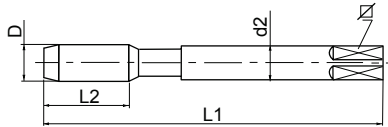

DIN 5156								4544.1	4544.V1	4544.T1
D	filetti x 1" TPI	∅ mm	L ₁	L ₂	d ₂	∇		nudi / naked	ST	TIN
1/8	28	9,73	90	15	7,0	5,5	8,80			
1/4	19	13,16	100	22	11,0	9,0	11,80			
3/8	19	16,66	100	22	12,0	9,0	15,25			
1/2	14	20,96	125	25	16,0	12,0	19,00			
3/4	14	26,44	140	25	20,0	16,0	24,50			
1"	11	33,25	160	30	25,0	20,0	31,00			
1 1/8"	11	37,90	170	30	28,0	22,0	35,50		-	-
1 1/4"	11	41,91	170	30	32,0	24,0	39,50		-	-
* 1 1/2"	11	47,80	190	32	36,0	29,0	45,50		-	-
* 2"	11	59,61	220	40	45,0	35,0	57,00		-	-

* Acciaio HSS / HSS Steel

Materiali / Application: nudi / naked: A1 - A2 - A3 - A4 / AM1 - AM2 / R1 - R2

ST: A1 - A2 - A3 - A4 / AM1 - AM2 / R1 - R2 / T1 / N1

TIN: A1 - A2 - A3 - A4 / G3 - G4 / AM1 - AM2- AM3 / R1 - R2