

## MASCHI A MACCHINA - MACHINE TAPS

MASCHI A MACCHINA A RULLARE **HSS-Co-8%**

Filettatura ASME B1.1 a passo grosso **UNC - 2BX**

**Con canalini laterali di lubrificazione - Imbocco "C"**

**Rivestimento TiN**

**COLD FORMING MACHINE TAPS HSS-Co-8%**

ASME B1.1 Unified Coarse Thread **UNC - 2BX**




**With lateral lubrication little flutes - Chamfer form "C"**

**TiN coated**


 HSS-Co-8%




4567.T




**DIN 371 D ≤ 3/8 UNC**

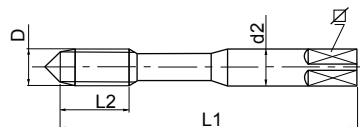

**DIN 376 D ≥ 7/16 UNC**

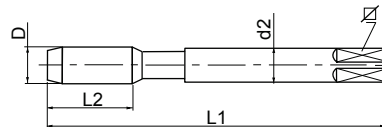

DIN 371 / DIN 376							4567.T
D	filetti x 1" TPI	L <sub>1</sub>	L <sub>2</sub>	d <sub>2</sub>	∅		
n. 6	32	56	11	4,0	3,0	3,15	
n. 8	32	63	13	4,5	3,4	3,80	
n. 10	24	70	13	6,0	4,9	4,30	
n. 12	24	80	16	6,0	4,9	5,00	
1/4	20	80	16	7,0	5,5	5,75	
5/16	18	90	18	8,0	6,2	7,25	
3/8	16	100	20	10,0	8,0	8,75	
7/16	14	100	20	8,0	6,2	10,30	
1/2	13	110	25	9,0	7,0	11,80	
9/16	12	110	28	11,0	9,0	13,30	
5/8	11	110	28	12,0	9,0	14,80	
3/4	10	125	32	14,0	11,0	17,9	

Materiali / Application: A1 - A2 - A3 - A4 / X1 - X2 - X3 / AM1 - AM2 - AM3 / R1 - R2