

## MASCHI A MACCHINA - MACHINE TAPS

MASCHI A MACCHINA **HSSE M35 5%Co**

SCANALATURE DIRITTE con IMBOCCO CORRETTO forma "B"

Filettatura ISO metrica DIN 8140-2 "EG" per filetti riportati

MACHINE TAPS **HSSE M35 5%Co**

STRAIGHT FLUTES SPIRAL POINT (GUN NOSE) - Chamfer form "B"

ISO Metric Coarse Thread DIN 8140-2 "EG" for wire thread inserts

 HSSE



4311.1






4313.1



4311.F1





4313.F1



**DIN 40435**

**DIN 40435**

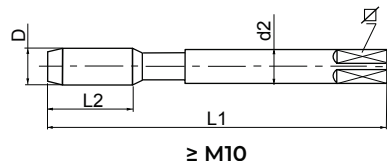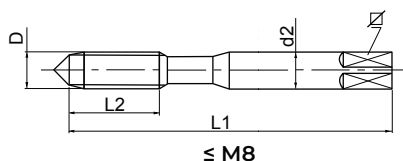

DIN 40435								4311.1	4313.1	4311.F1	4313.F1
D	P	∅ mm	L <sub>1</sub>	L <sub>2</sub>	d <sub>2</sub>					TX	TX
3	0,5	3,65	63	13	4,5	3,4	3,15		-		-
4	0,7	4,91	70	13	6,0	4,9	4,20		-		-
5	0,8	6,04	80	16	6,0	4,9	5,25		-		-
6	1	7,30	90	18	8,0	6,2	6,30		-		-
8	1,25	9,62	100	20	10,0	8,0	8,40		-		-
10	1,5	11,95	100	22	9,0	7,0	10,50	-		-	
12	1,75	14,27	110	28	11,0	9,0	12,50	-		-	
14	2	16,60	110	28	12,0	9,0	14,50	-		-	
16	2	18,60	125	33	14,0	11,0	16,50	-		-	

Altre dimensioni su richiesta / Other dimensions on demand

Materiali / Application: nudo / naked: A1 - A2 - A3 - A4 / AM1 - AM2 / R1 - R2

TX: A1 - A2 - A3 - A4 / X1 - X2 / G3 - G4 / AM2 - AM3 / R2

## MASCHI A MACCHINA - MACHINE TAPS

PUNTE MASCHIO **HSSE M35 5%Co**

SCANALATURE ELICOIDALI - Imbocco "C"


Filettatura metrica DIN 8140-2 "EG" per filetti riportati

MACHINE DRILL TAPS **HSSE M35 5%Co**

SPIRAL FLUTES - Chamfer form "C"

Iso Metric Coarse Thread DIN 8140-2 "EG" for wire thread inserts

 HSSE



4312.1



4314.1



4312.3






4314.3



4312.F3




4314.F3




**DIN 40435**

**DIN 40435**

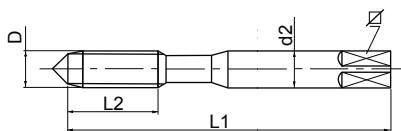

≤ M8



≥ M10

DIN 40435									4312.1	4314.1	4312.3	4314.3	4312.F3	4314.F3
D	P	∅ mm	L <sub>1</sub>	L <sub>2</sub> <sup>(1)</sup>	d <sub>2</sub>			Elica destra 15° Right helix 15°	Elica destra 15° Right helix 15°	Elica destra 40° Right helix 40°	Elica destra 40° Right helix 40°	Elica destra 40° Right helix 40°	Elica destra 40° Right helix 40°	
												TX	TX	
3	0,5	3,65	63	7	4,5	3,4	3,15	*	-	-	-	-	-	
4	0,7	4,91	70	8	6,0	4,9	4,20	*	-	-	-	-	-	
5	0,8	6,04	80	10	6,0	4,9	5,25	*	-	-	-	-	-	
6	1	7,30	90	13	8,0	6,2	6,30	*	-	-	-	-	-	
8	1,25	9,62	100	15	10,0	8,0	8,40	*	-	-	-	-	-	
10	1,5	11,95	100	15	9,0	7,0	10,50	-	*	-	-	-	-	
12	1,75	14,27	110	20	11,0	9,0	12,50	-	*	-	-	-	-	
14	2	16,60	110	20	12,0	9,0	14,50	-	-	-	-	-	-	
16	2	18,60	125	25	14,0	11,0	16,50	-	-	-	-	-	-	

(1) lunghezza filetto elica 15° maggiore dei valori indicati / length of thread in helix 15° version larger than data indicated

Altre dimensioni su richiesta / Other dimensions on demand

\* Prezzo a richiesta / Price on demand

Materiali / Application: nudo / naked: A1 - A2 - A3 - A4 / AM1 - AM2 / R1 - R2

TX: A1 - A2 - A3 - A4 / X1 - X2 / G3 - G4 / AM2 - AM3 / R2