

MASCHI A MACCHINA - MACHINE TAPS

MASCHI A MACCHINA

SCANALATURE ELICOIDALI - **ELICA DESTRA 45° / 48°** - Imbocco "C"

Filettatura ISO **228X** - GAS cilindrica BSP

MASCHIATURA RIGIDA SINCRONIZZATA

Universali - per INOX


MACHINE TAPS

SPIRAL FLUTES - **RIGHT HELIX 45° / 48°** - Chamfer form "C"


ISO **228X** - Whitworth pipe thread BSP

RIGID TAPPING SYNCHRO

Universal use - for stainless steel

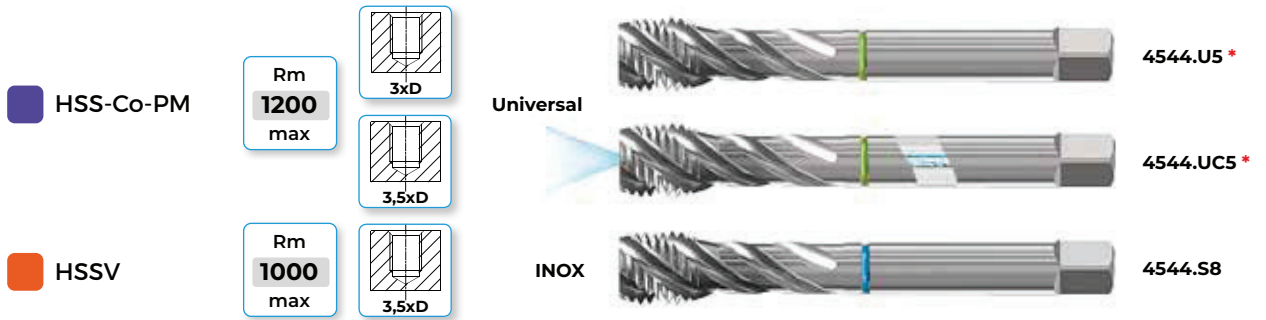

DIN 5156

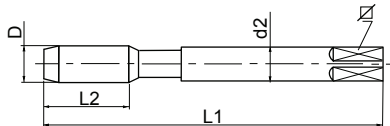

DIN 5156								4544.U5	4544.UC5	4544.S8
D	filetti x 1" TPI	∅ mm	L ₁	L ₂	d ₂	∇		ASP30 + TX	ASP30 + TX	HSSV + HPC
1/8	28	9,73	90	15	7,0	5,5	8,80			
1/4	19	13,16	100	15	11,0	9,0	11,80			
3/8	19	16,66	100	15	12,0	9,0	15,25			
1/2	14	20,96	125	18	16,0	12,0	19,00			
3/4	14	26,44	140	20	20,0	16,0	24,50			
1"	11	33,25	160	24	25,0	20,0	31,00			

Materiali / Application: 4544.U5: A1 - A2 - A3 - A4 - A5 / X1 - X2 - X3 / G3 - G4 / AM2 - AM3 / R2
 4544.UC5: A1 - A2 - A3 - A4 - A5 / X1 - X2 - X3 / G3 - G4 / AM2 - AM3 / R3
 4544.S8: A3 - A4 - A5 / X1 - X2 - X3 - X4